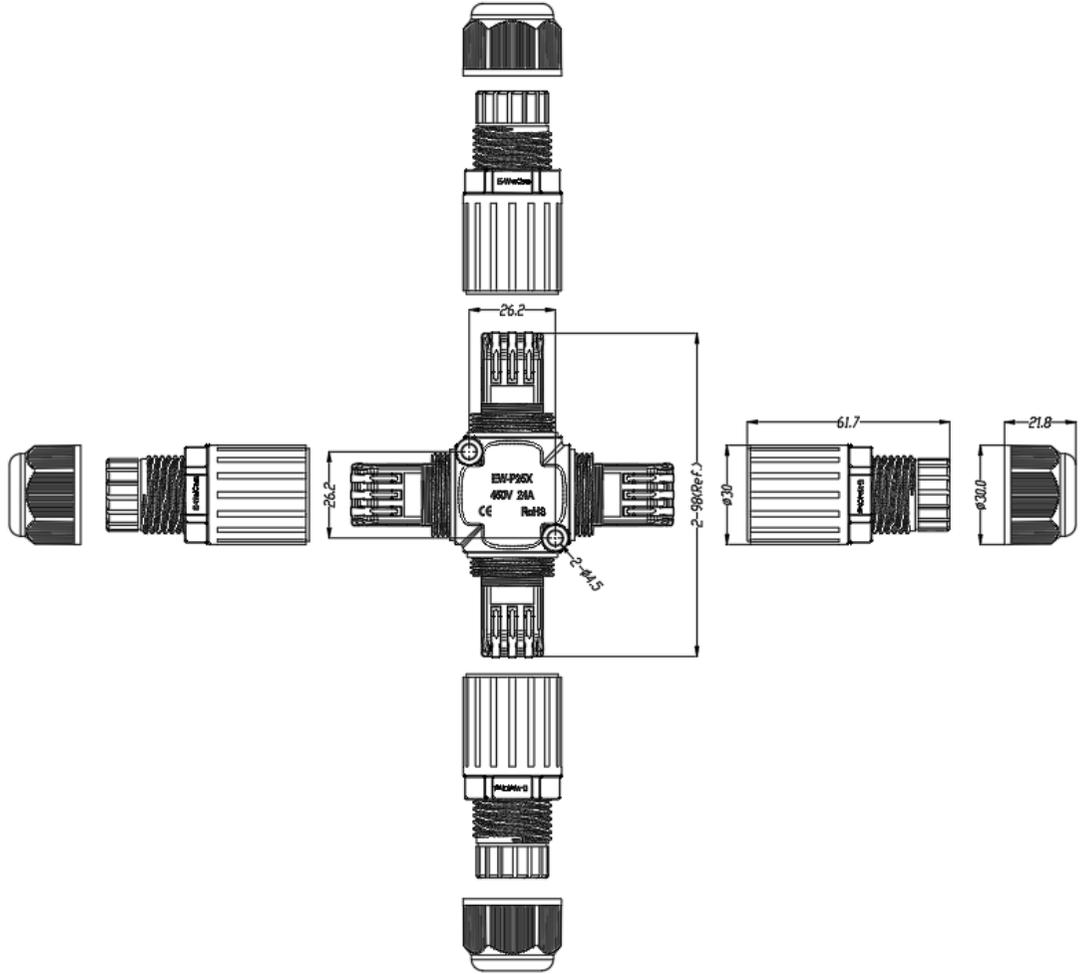
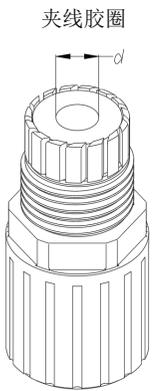
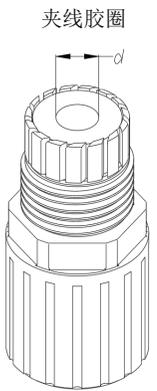


1	2		3	4		5	6	7	8				
A	原材料		PA66、铜合金、硅胶					版本	说明	设计	日期		
	符合认证标准		RoHS/CE					A0	首次发布	EDDIE	2022/4/25		
	阻燃等级		UL94 V-0										
	防护等级		IP68										
	额定电压 / 额定电流		450 V / 24 A										
B	耐电压		2500 V		<p>产品颜色以实物为准，图片仅供参考</p>								
	线材规格		0.5~2.5mm <sup>2</sup>										
	工作温度		-40~105 °C										
C	产品料号		胶圈孔径 d	适用线外径									
	EW-P25X-03301YB14		φ 14.5 mm	φ 10~14 mm									
	EW-P25X-03301YB12		φ 12 mm	φ 9~12 mm									
D	EW-P25X-03301YB8		φ 8.5 mm	φ 5~9 mm									
E	夹线胶圈												
F	156 g		42x30x34 cm	100 PCS	15.6 Kg	未注公差		单位	mm	绘图	料号	EW-P25X-03301YB##	
	产品单重	外箱尺寸	单箱数量	单箱毛重	X. ±0.35 X.XX ±0.10 X.X° ±3° X.X° ±2° X.XX° ±1°	比例	1:1	校对	图号	EW-P25X-03301YB##			
					X.X ±0.20 X.XXX ±0.05 X.XX° ±1°	页次	1/1	批准	品名	EW-P25X 防水连接器			
1	2		3	4		5	6	7	8				