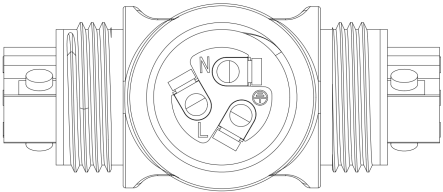

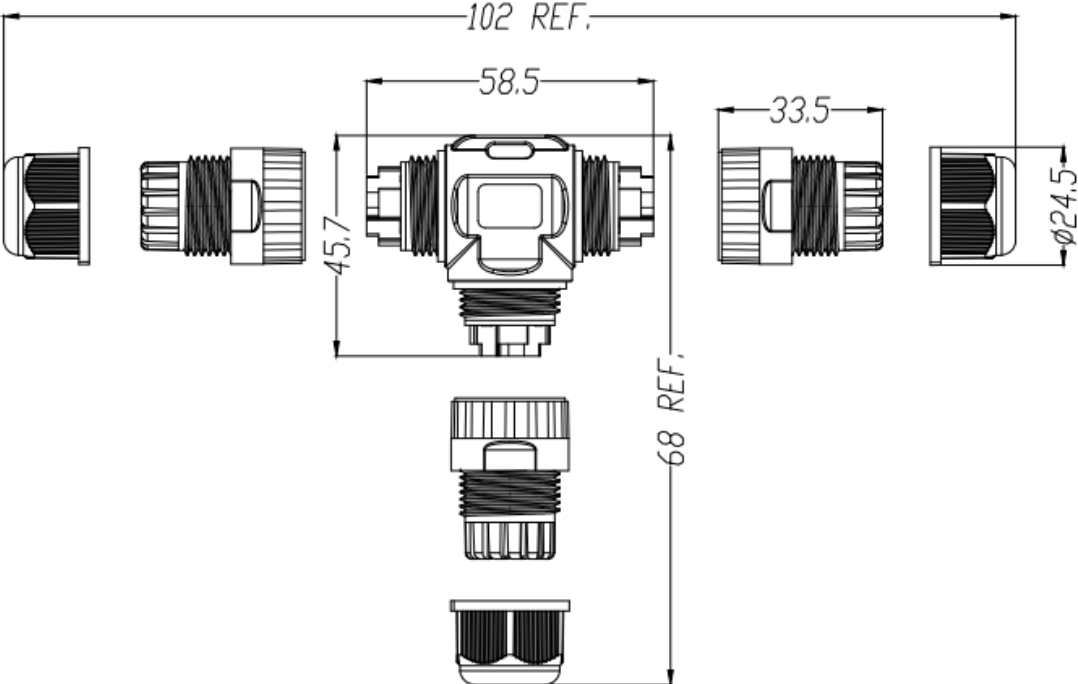
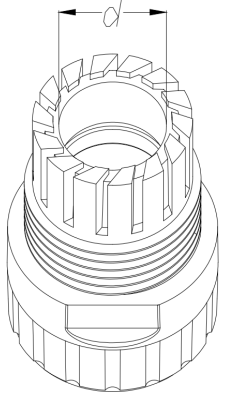



1	2		3	4	5	6	7		8									
A	原材料		PA66、铜合金、硅胶		3 PIN 	版本	说明	设计	日期									
	符合认证标准		CQC/TUV/UL/SAA/Rohs/CE			A0	首次发布	Andy. Pi	2022/4/22									
	阻燃等级		UL94 V-2															
	防护等级		IP68															
	额定电压 / 额定电流		450 V / 24 A															
B	耐电压		2500 V			产品颜色以实物为准，图片仅供参考												
	线材规格		0.5~2.5mm ²															
	工作温度		-40~105 °C															
	产品料号		胶圈孔径 d								适用线外径							
	EW-M20T-03102YB11		φ 11.5 mm		φ 9~12 mm													
	EW-M20T-03102YB8		φ 8.5 mm		φ 5~9 mm													
	EW-M20T-03102YB5		φ 5.0 mm		φ 3~5 mm													
C																		
D	夹线胶圈 																	
E																		
F																		
69.2 g		42x30x34 cm		250 PCS		18.0 Kg		未注公差		单位		mm	绘图	料号	EW-M20T-03102YB##			
产品单重		外箱尺寸		单箱数量		单箱毛重		X. ±0.35 X.XX ±0.10 X.X° ±3° X.XX° ±2° X.XX° ±1°		比例		1:1	校对	图号	EW-M20T-03102YB##			
								X.X ±0.20 X.XXX ±0.05		页次		1/1	批准	品名	EW-M20T-3P 支架型防水连接器			
1	2		3	4	5	6	7		8									